





SF 4770
SILVER GREY



SF 4740
ORANGE

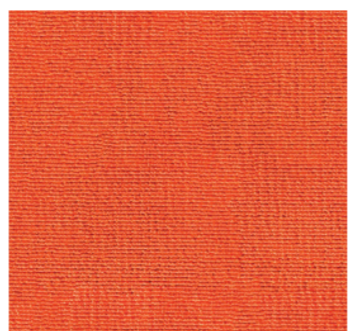

SF 4780
CHARCOAL

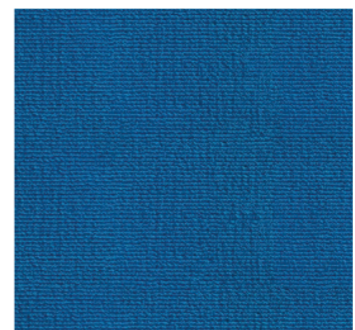


SF 4721
MONO BLUE



SF 4711
CHILLY RED



SF 4720
NAVY BLUE



SF 4722
BRILLIANT BLUE



SF 4730
GREEN




SF 4751
DARK BEIGE




SF 4763
DARK BROWN


INSTALLATION METHOD




1. BRICK



2. ASHLAR



3. DIRECTIONAL



4. QUARTER RUN

SPECIFICATION

Name	Surface SQ
Construction	Multi-Level Loop Pile
Yarn	P.P.B.C.F. UV Treated
Gauge	1/10
Pile Weight	650 gsm
Pile Height	4 mm - 6 mm
Primary Backing	Non Woven
Secondary Backing	Modified Bitumen with Glass Fiber
Tile Size	50 cm X 50 cm
Area of Use	Heavy Commercial
Smoke Density Test	ASTM E 662-06
Fire Class	ASTM D 2859/CPSC FF 1-70 Flammability Test
	ASTM R 648 Radiant Panel Test
Static Control	AATCC-175 Stain Resistance
Packing	20 pcs per carton

BOOKLET

17. surface sq